

Project:		
Item:		
Quantity: _		

Nesting Pan Rack


-"U" Type





Nesting racks are designed to fit together when not in use, maximizing storage space. Heavy duty aluminum tube and angle slides maximize strength and durability.

- All welded construction ensures the maximum strength and stability of each rack.
- Supporting cross braces have gussets securely welded into place to prevent "racking".
- Equipped with four 5" heavy duty, plate type casters These all welded aluminum carts are designed to be pushed around.
 - Non-marking wheels protect floors and minimize noise.
- All seams are fully welded and sealed; Providing a smooth, easy to clean surface.
 - No cracks or crevices to trap dirt!
- Five-Year Guarantee against material defects and workmanship.
- Lifetime Guarantee against rust and corrosion.
- NSF Certified

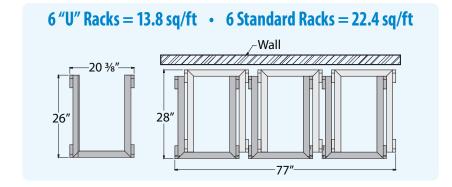







All sheet pan racks quoted hold USA standardized 18 x 26" sheet pans (17% x 25%" actual). We are not responsible for pans that do not meet the industry standard, which may not fit our racks.

New Age Industrial Corp., Inc. || NewAgeIndustrial.com || Made in the USA

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654 || **Phone: (800) 255-0104 • (785) 877-5121** || Fax: (877)-877-7687 • (785) 877-2616


This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time, without notice, to materials and specifications.




Project:_		
, –		

Quantity: _____

Nesting Pan Rack



Top View

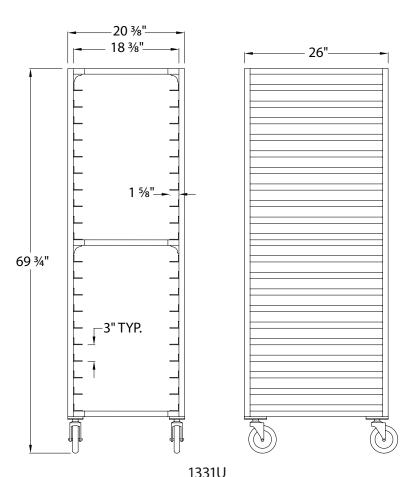

MATERIAL: Heavy duty, high tensile, extruded aluminum. Type 6063-T5 alloy. Extruded on site.

CONSTRUCTION: All heli-arc welded with all seams welded and sealed. No rivets.

SIDES: Vertical uprights are constructed of 1" x 1" x .070" wall tubing with 1¼" x 15/8" x .100" angle runners, spaced on 2" or 3" centers.

HORIZONTAL "U" SUPPORTS: Constructed of 1" x 2" tubing, welded in a "U" shape.

CORNER GUSSETS: Gussets are 1½" x1½" x 5%" thick angle, Securely welded to the bottom of the inside angle, where horizontal cross braces meet vertical uprights

- Note: Gussets add an extra 41/2" of weld for strength and durability.

BASE: A "U" support frame with pre-tapped caster plates welded to each corner.

CASTERS: Plate type, full swivel casters with sealed ball bearings. Equipped with 5" non-marking polyurethane wheels.

NSF Certified.

► Nesting Pan Rack - "U" Type

Model No.	Size W-H-D	Pan Capacity	Runner Spacing	Ship Lbs.
1330U	203/8" x 693/4" x 26"	30	2"	77
1331U	203/8" x 693/4" x 26"	20	3"	66

Four 5" plate type swivel casters.

Designed to accommodate 13" x 18", 14" x 18" and 18" x 26" pans.

Options: Options may not be NSF Certified. Contact the factory.

- ☐ Caster Locks (2) Add "CL" suffix to model #.
- Medical Caster Upgrade Add "MD" suffix to model #.
- ☐ **Vertical Bumpers (4)** Add "VB" suffix to model #.







All sheet pan racks quoted hold USA standardized 18 x $26^{\prime\prime}$ sheet pans (17% x $25\%^{\prime\prime}$ actual). We are not responsible for pans that do not meet the industry standard, which may not fit our racks.

New Age Industrial Corp., Inc. | NewAgeIndustrial.com | Made in the USA

PO Box 520 • 16788 US Hwy 36 • Norton, Kansas 67654 || Phone: (800) 255-0104 • (785) 877-5121 || Fax: (877)-877-7687 • (785) 877-2616

This information is for general sales and engineering use only. New Age Industrial reserves the right to modify or make changes at any time, without notice, to materials and specifications.